

ROPE DEFLECTION ANGLE







BISECTED	
ROPE ENTRY	

STRAIGHT ROPE ENTRY

DEFLECTION ANGLE, 'A' (°)	MAX TENSION (kg)
10	8610
15	5750
30	2900
45	1960
60	1500
90	1060

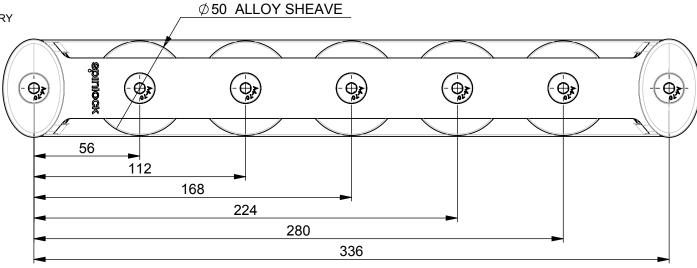

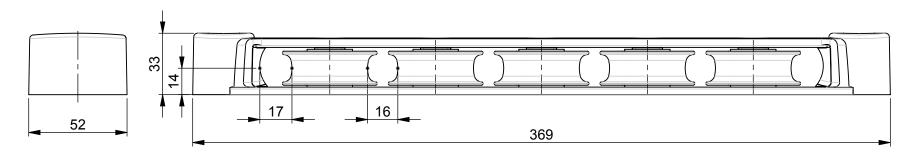



IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS BEFORE DRILLING.



COPYRIGHT: THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

	1:2	A4	APR 2018	
'S	SCALE	PAGE SIZE	DATE	
RF	ALL DIMENSIONS IN MM			

E SIZE	DATE
4	APR 2018

M8 CSK Ø 14mm x 7

MAX LINE SIZE

SWL PER **FASTENERS** WEIGHT SHAVE 1080g 1500kg

TOTAL SWL PER UNIT

3750kg

TC50/5

FOR MORE INFO CONTACT SPT@SPINLOCK.CO.UK