
ROPE DEFLECTION ANGLE








BISECTED ROPE ENTRY

STRAIGHT ROPE ENTRY

DEFLECTION	MAX
ANGLE, 'A'	TENSION
(°)	(kg)
10	8610
15	5750
30	2900
45	1960
60	1500
90	1060

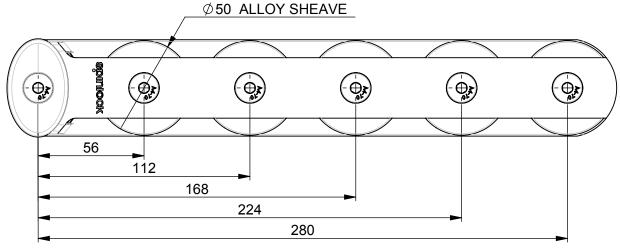



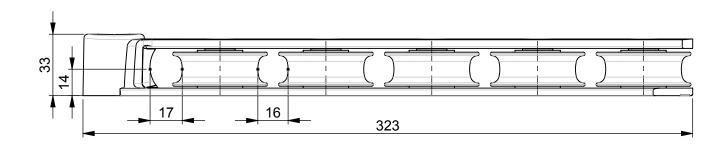

spinlock BE ADVENTURE-PROOF



IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS BEFORE DRILLING.



COPYRIGHT: THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

	1:2	A4	APR 2018	
<u>s</u>	SCALE	PAGE SIZE	DATE	
E	ALL DIMENSIONS IN MM			

=	DATE	
	APR 2018	

M8 Ø 14mm x 6

MAX LINE SIZE

FASTENERS	WEIGHT
M8 CSK	970g

SWL PER TOTAL SWL SHAVE

1500kg

PER UNIT

3750kg

TC50/5Y

FOR MORE INFO CONTACT SPT@SPINLOCK.CO.UK