
ROPE DEFLECTION ANGLE








STRAIGHT ROPE ENTRY

DEFLECTION ANGLE, 'A' (°)	MAX TENSION (kg)
10	8610
15	5750
30	2900
45	1960
60	1500
90	1060



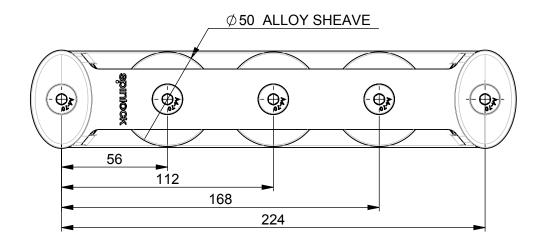



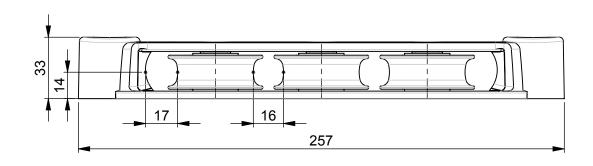

MAX LINE SIZE

spinlock BE ADVENTURE-PROOF

IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AS CHECK DIMENSIONS BEFORE DRILLING.




THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

SETTINGS ARE	ALL DIMENSIONS IN MM			
AND ALWAYS	SCALE	PAGE SIZE	DATE	
	4.0	Λ .	APR	

FAGE SIZ
A4

DATE	H
APR	
2018	



FASTENERS

WEIGHT	SWL PER SHAVE	
730g	1500kg	

TOTAL SWL PER UNIT

2250kg

TC50/3

FOR MORE INFO CONTACT SPT@SPINLOCK.CO.UK